


Question

[Nikita Savchenko](#) · Nov 2, 2016

Startup Tag^Routine property for UnknownUser


Hello community!

I am trying to set up Startup Tag^Routine field for the UnknownUser as follows:

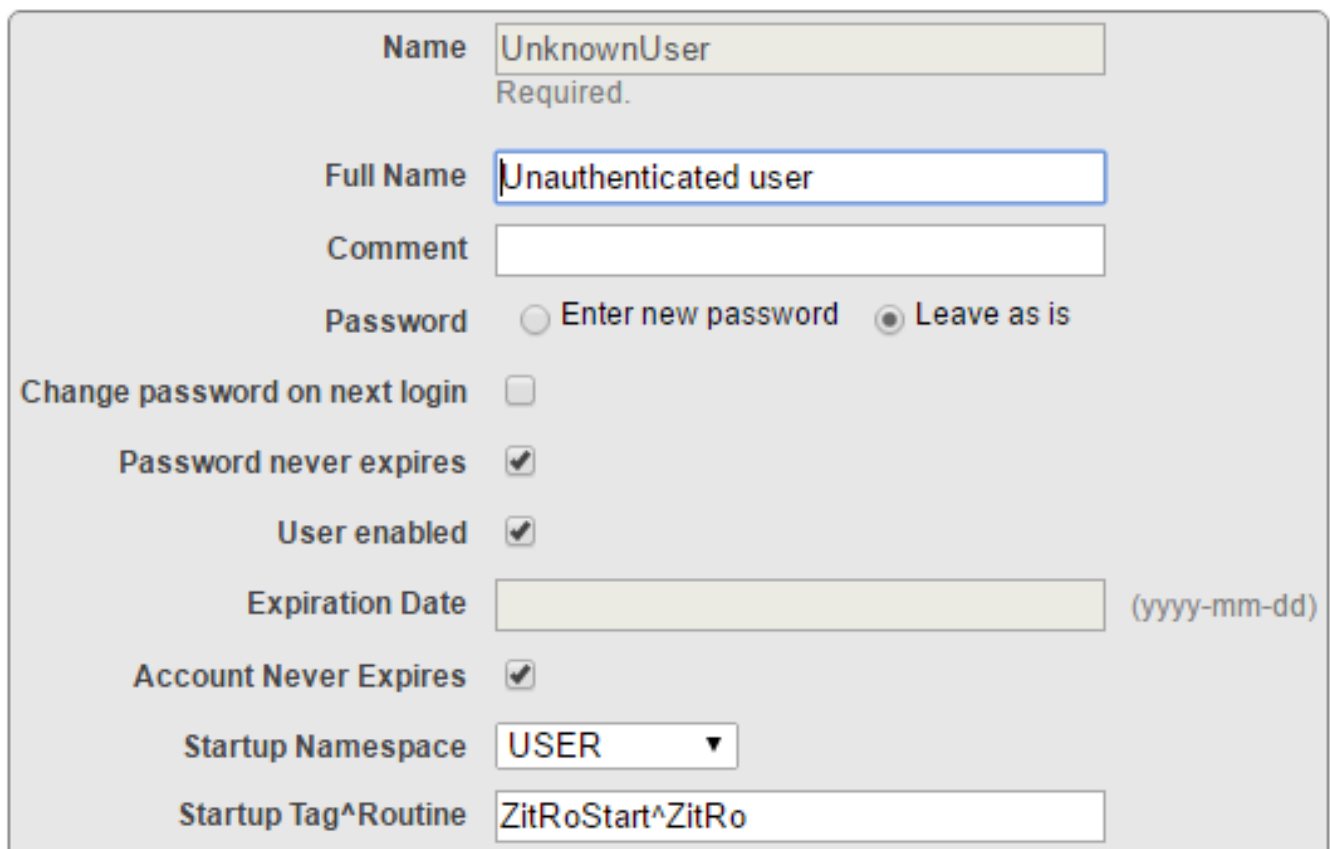


The screenshot shows the configuration form for the 'UnknownUser' user. The 'Name' field is 'UnknownUser' with a 'Required.' label below it. The 'Full Name' field is 'Unauthenticated user'. The 'Comment' field is empty. The 'Password' section has two radio buttons: 'Enter new password' (unselected) and 'Leave as is' (selected). Below this are three checkboxes: 'Change password on next login' (unchecked), 'Password never expires' (checked), and 'User enabled' (checked). The 'Expiration Date' field is empty with a '(yyyy-mm-dd)' label to its right. The 'Account Never Expires' checkbox is checked. The 'Startup Namespace' dropdown is set to 'USER'. The 'Startup Tag^Routine' field is 'ZitRoStart^ZitRo'.

And my simple routine is the next:

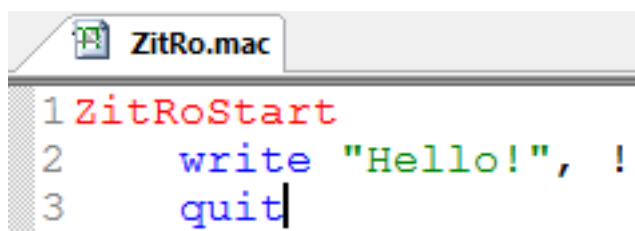

```
1 ZitRoStart
2   write "Hello!", !
3   quit
```

Calling `do ZitRoStart^ZitRo` in the terminal prints "Hello", but when opening Caché Terminal it results with the next:

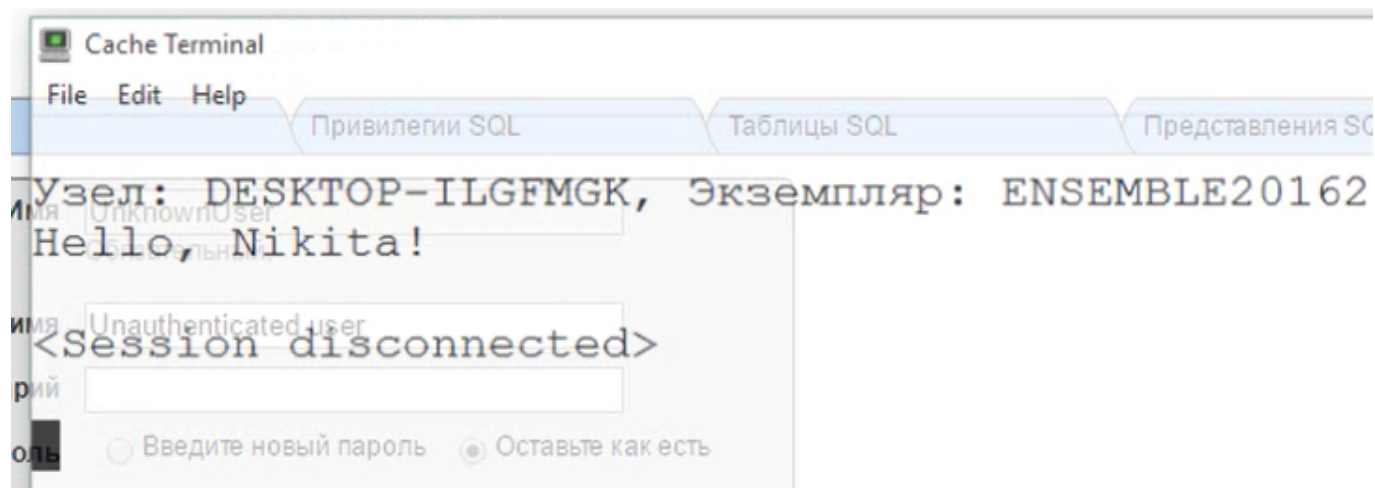

And the terminal closes.

// Cache for Windows (x86-64) 2016.2 (Build 636U) Wed Apr 13 2016 20:58:35 EDT

What am I doing wrong in setup?

Thank you very much!

[#Caché](#) [#Terminal](#) [#Access control](#) [#System Administration](#)

Source URL: <https://community.intersystems.com/post/startup-tagroutine-property-unknownuser>