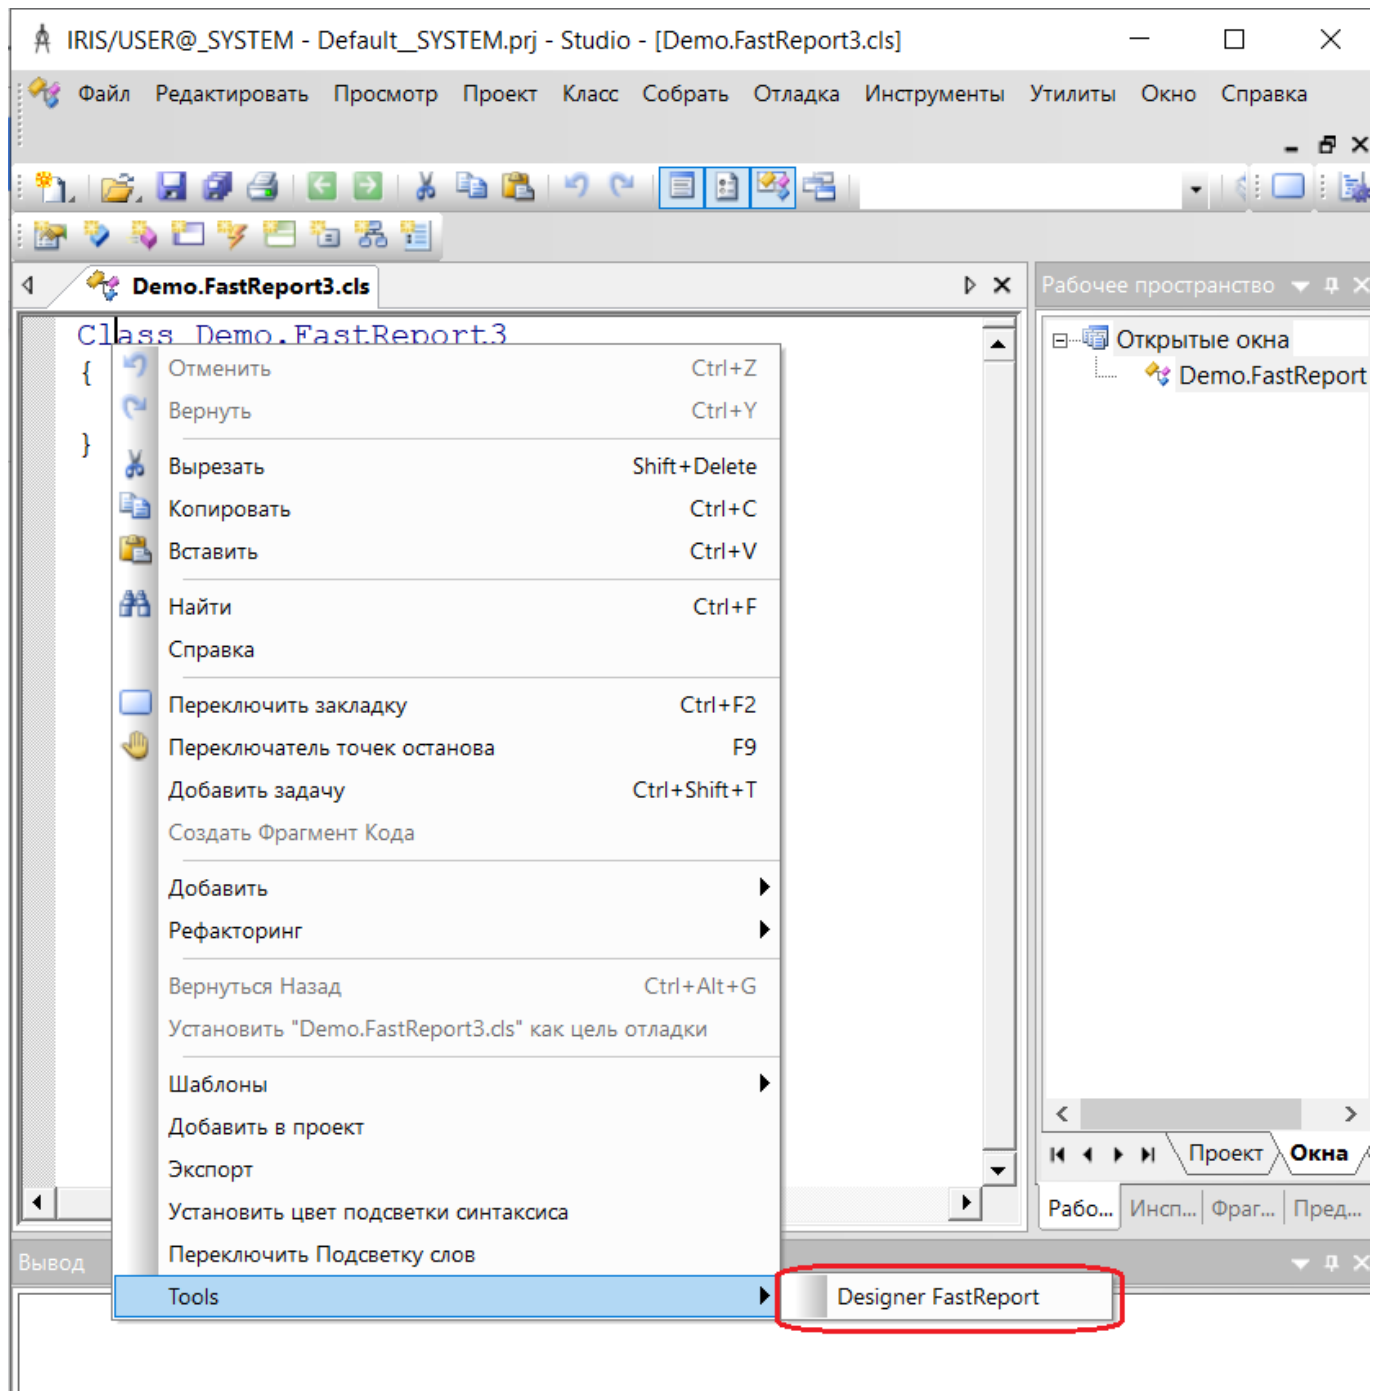

Question

[Ivan Myasnikov](#) · Jan 21, 2019

Custom context menu without version control system using the example of the Cache FastReport plugin

Good day.

The issue is related to Cache Studio. I wrote a plugin for creating reports using FastReport. The plugin is called via the context menu. In this case, the class is `d ## (%ZFastReport.SourceControl)`
`.InstallSorceControllAllNameSpace ()`.



Example: <https://github.com/MyasnikovIA/CacheFastReport>

1) Tell me please, can I create a context menu for calling a program, without using a version control system?

2) How to determine the local location of the CStudio.exe file on the client side? The plugin is located on the client in the BIN directory. `^%SYS("bindir")` is not suitable, because the directory in which Cache is installed is different from the local installation

[#Object Data Model](#) [#Caché](#)

Source

URL:<https://community.intersystems.com/post/custom-context-menu-without-version-control-system-using-example-cache-fastreport-plugin>