

## How could we get the SourceConfigName from a Ens.Response sent by an Operation to the BPL?

Question

[Yone Moreno](#) · Jul 15, 2020

## How could we get the SourceConfigName from a Ens.Response sent by an Operation to the BPL?

Hello,


We would need to know the Ens.Response SourceConfigName to identify which Operation has raised an exception.

We have tried:

```
$$$LOGINFO("..%Process.%PrimaryResponseHeader.SourceConfigName..: "..%Process.%PrimaryResponseHeader.SourceConfigName) //It outputs an empty string
```

```
$$$LOGINFO("response.SourceConfigName: "_response.SourceConfigName) //It generates an exception
```

We would need to get from an Ens.Response which body is null, its SourceConfigName:

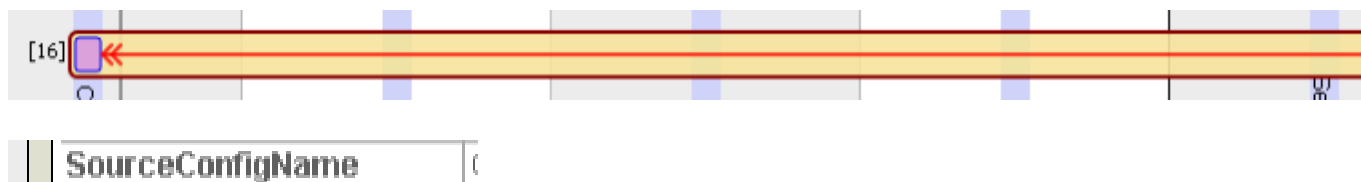

How could we know it? ?

[#Business Operation](#) [#Business Process \(BPL\)](#) [#Interoperability](#) [#Ensemble](#)

00 3 0 2 129

Log in or sign up to continue

Add reply

**Source URL:** <https://community.intersystems.com/post/how-could-we-get-sourceconfigname-ensresponse-sent-operation-bpl>