


## Question

[Mark O'Reilly](#) · Jul 1, 2021

# How to Initiate context class for DTL

Hi, I think it's a simple question this at the end of something fairly complex

I've a DTL to go to a target class in context

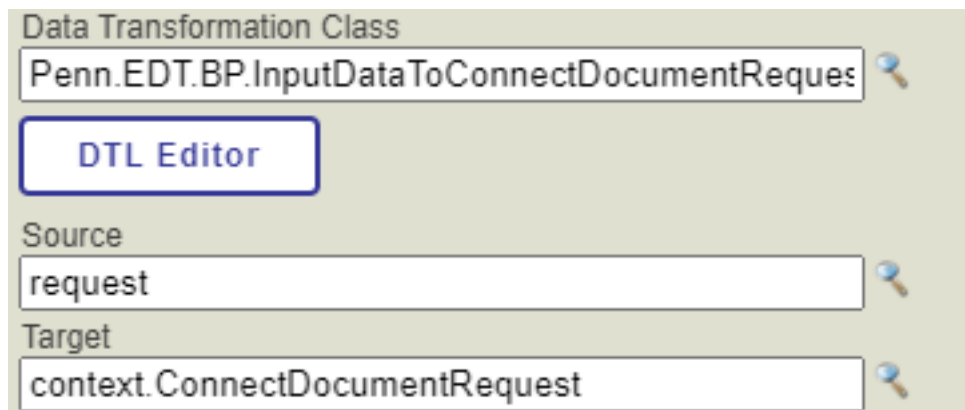

I get the error CLASS DOES NOT call request=##class(context.ConnectDocumentRequest).%New()

I attempted to add code to initiate the context with


```
set context.ConnectDocumentRequest =##class(Penn.EDT.Messages.ConnectDocumentRequest).%New()
```

I know there is something basic i am missing but have not seen covered in any tutorials i have done.

I see an example using Assign I tried assigning my context as

```
$CLASSMETHOD("Penn.EDT.Messages.ConnectDocumentRequest", "%New")
```

What is it i am missing before the DTL (yes i accidentally named it .BP instead of .DTL)

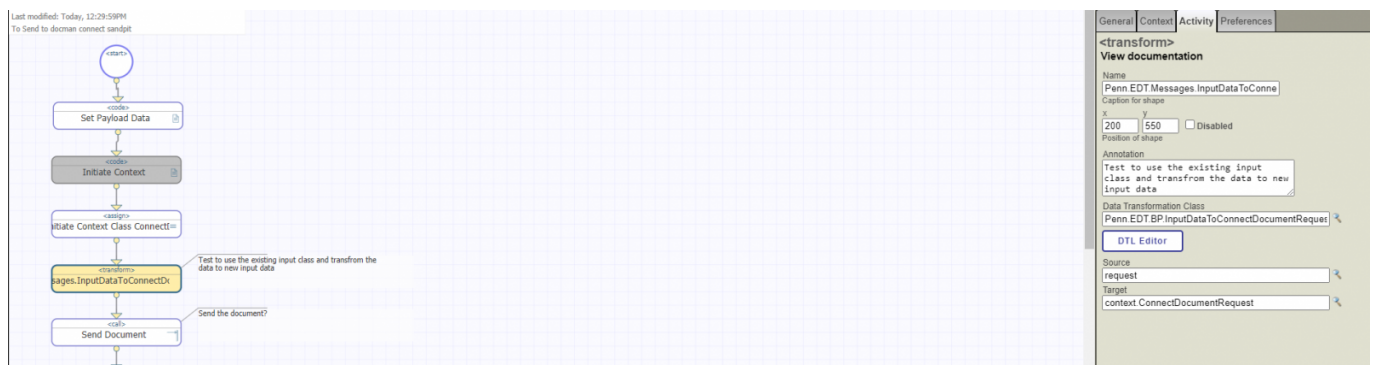

[#Business Process \(BPL\)](#) [#InterSystems IRIS](#) [#InterSystems IRIS for Health](#)

Product version: IRIS 2020.1

Source URL: <https://community.intersystems.com/post/how-initiate-context-class-dtl>

