


### Question

[Scott Roth](#) · Mar 22, 2022

## Business Process setup - Orphaned Messages

I am still trying to track down orphaned messages and have noticed that when we have Business Rules that send to a Business Process that some times there is an orphaned message that is generated as result of that send.

- So my question is, is there an issue with the way that we have setup our Business Processes as they are setup with a request class of Ens.Request, and a response class of Ens.Response when the message is truly an HL7 message?
- Shouldn't the request class and response class be EnsLib.HL7.Message?
- Why would an orphaned message be created from the send from a Business Rule to a Business Process?

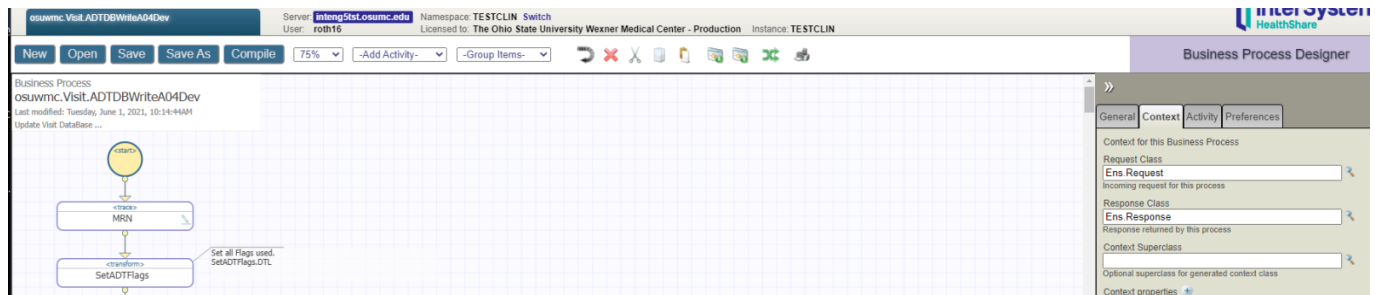

[#Business Process \(BPL\)](#) [#Business Rules](#) [#HL7](#) [#Ensemble](#)

Product version: Caché 2018.1

\$ZV: Cache for UNIX (IBM AIX for System Power System-64) 2018.1.3 (Build 414U) Mon Oct 28 2019 11:24:02 EDT

Source URL: <https://community.intersystems.com/post/business-process-setup-orphaned-messages>